

WHY AN AIMPOINT® RED DOT SIGHT?

To be successful, shooters must be able to aim accurately and quickly under a wide variety of conditions. On a shooting range, there is plenty of time to take aim, but in the real world, everything is in fast motion. Add rough terrain, foul weather, poor light and high levels of stress and even the most experienced marksman will be put to the test.

Military tests have repeatedly proven that the single red dot reticule is the fastest on target in timed and rapid-fire close combat exercises, and also provides the greatest increase in hit probability with moving targets. Other aiming devices require that the shooter's focus leaves the target or create limited situational awareness. Aimpoint dot sights give you increased aiming confidence, allow you to remain on target and shoot with both eyes open, so you are fully aware at all times.

12 a

WHEN YOUR LIFE DEPENDS ON YOUR EQUIPMENT

When the time comes to take the shot, there should be no question that you can count on your sight to perform. We believe that a weapon sight should simplify aiming while meeting the highest possible requirements for reliability and ruggedness. We know that conditions in the field place extreme demands on your equipment, so we design and test Aimpoint products to stand up to any condition you are likely to encounter. We also design our products to operate constantly for years on a single battery so your sight will be ready when you are. Whether in the field or on the streets, you can count on Aimpoint® red dot sights.

AIMPOINT - GLOBAL LEADER

Aimpoint is the recognized worldwide leader and originator of red dot sighting technology. After 40 years of working closely with experienced marksmen and military weapon experts around the world, Aimpoint red dot sights remain the number one choice for combining ruggedness, speed and accuracy. Aimpoint sights are in service with most NATO countries, the US Army, US Air Force, the US Navy, the US Marine Corps, and numerous other military forces, police agencies, and special teams worldwide.

Aimpoint red dot sights - soldier tested and combat proven.



ALL CONDITIONS -ANYWHERE

Aimpoint sights work in all light conditions from darkness to bright desert sunlight. They are fully submersible so you never have to worry about rain or immersion. Aimpoint sights are developed and tested to be used in any weather conditions, from the subzero temperatures of the Arctic to the heat and humidity of the tropics.

On any type of firearm

Whether you have a rifle, shotgun, handgun or crew-served weapon, Aimpoint has a sight for you.

User friendliness

Aimpoint sights are extremely user friendly. Operated by a mechanical switch, an Aimpoint sight can be easily and quickly changed to the right setting while simultaneously aiming through your sight. Our mechanical switch won't freeze and is easy to use whether you are wearing gloves or not.

Environmental awareness

At Aimpoint, we take great pride in making sure that neither hazardous nor radioactive materials are used in our sights.



STANDARD FEATURES ON ALL AIMPOINT SIGHTS

- · Unlimited field of view
- · Parallax-free
- · Unlimited eye relief
- · Unaffected by extreme weather conditions
- · Extremely rugged, durable construction
- · No hazardous materials
- · No laser emission that could be harmful to your eyes
- · Increased aiming confidence and hit probability
- · Reduced training time and ammunition consumption
- Battery life measured in years



"For me, the Aimpoint Micro T-1 is a belief. A belief that I'm going to achieve first round lethal strikes under any conditions, that I'm going to out shoot, out perform the bad guy no matter the environment or situation."

Jeff Gonzales, US Navy SEAL and president at TRICON™.

MICRO SERIES SIGHTS

MICRO T-1

Dot size 2 or 4 MOA*
Battery life: 50,000 hours**
Battery type: CR2032

Weight: 3.0 oz Compatible with CEU & 3XMag (see page 15) and all

generation NVDs***



Since its introduction in 2007, the Micro T-1 has become very popular sight worldwide due to its size, light weight and robust construction. It is in use with special forces, law enforcement and military units around the world.

Complete and ready to mount

The standard configuration of the Micro T-1 contains the sight, a Picatinny mount and bikini rubber lens covers. **Complete information for this product**

Customize your sight

The Micro sights can be customized according to your preferences and needs. Other mounts and spacers are available to meet the demands of your specific mission and equipment. See page 19-20. The Aimpoint Micro sights can easily be "piggy-backed" on top of larger magnifying scopes.



MICRO T-2

Dot size 2 MOA*
Battery life: 50,000 hours**
Battery type: CR2032
Weight: 3.4 oz
Compatible with CEU &
3XMag (see page 15) and all
generation NVDs***

We listened to feedback coming from hard-core customers desiring an even more hard core Micro sight. With a redesigned and reinforced house body, as well as flip-up covers protecting the lenses, the Micro T-2 can withstand all types of environmental conditions. At the same time, we decided to improve upon the optical performance of the sight which results in a new lens and an important breakthrough in reflective lens coatings. This makes the Micro T-2 and the 3XMag magnifier a fantastic optical combination.

Complete and ready to mount

The standard configuration of the Micro T-2 contains the sight, a Picatinny mount, a black front flip cover, a transparent rear flip cover that allows the user to engage a target with both lens covers closed in an emergency situation.

Complete information for this product





MICRO SERIES SIGHTS



AIMPOINT MICRO H-1

Article No 11910 / 200018

Dot size 2 or 4 MOA*

Battery life*** 50,000 hours

Battery type CR2032

Weight 3.0 oz

Weight w mount 3.7 oz

Power Switch Rotary

Mounting Integrated

Picatinny/Weaver

Since its introduction in 2007, the Micro H-1 has become very popular worldwide due to its size, light weight and robust build quality.

Complete information for this product

Aimpoint Micro sights are both rugged and versatile. With numerous mounting options the Micro sights can be deployed on nearly every weapon in your armory.



READY TO GO KITS

The Aimpoint Patrol Rifle Optic and Aimpoint Carbine Optic are perfect for conditions that demand extreme accuracy and speed. Like all Aimpoint sights, the PRO and ACO work under all weather conditions and can take the hard knocks that law enforcement can dish out.



PATROL RIFLE OPTIC (PRO)

Item No 12841
Dot size 2 MOA*
Battery life**A 30,000 hours
Battery type 2L76 or DLI/3N
Weight 7.8 oz**
Weight w mount 11.6 oz
Power Switch Rotary
Mounting Integrated
Picatinny/Weaver

The PRO sight comes in a ready-to-go kit at a budget friendly price, a concept that appeals strongly to Law Enforcement units.

Complete and ready to mount

The PRO sight contains a QRP2 mount and a standard AR15 spacer which can be removed. It is also equipped with flip covers, a black front flip cover and a transparent rear flip cover that allows the user to engage a target with both lens covers closed in an emergency situation.

Customize your sight

Accessories and mounts are available if you want to upgrade your PRO sight. Complete information for this product





AIMPOINT CARBINE OPTIC (ACO)

Item No 200174
Dot size 2 MOA*
Battery life**A One year
Battery type DL 1/3N
Weight 6.7 oz
Weight w mount 10.6 oz
Power Switch Rotary
Mounting Integrated

Picatinny rail mount

The Aimpoint® Carbine Optic is designed specifically for use on AR-15 and M4 carbine style rifles, incorporating proven design features and premium Aimpoint quality at an affordable price point. With a one-year battery life and 2 MOA dot, the ACO was is the smart choice for today's modern sporting rifle owner.

Complete and ready to mount

The ACO is ready to mount and shoot directly out of the box. The ACO pairs a 30mm aluminum alloy sight tube with an extremely rugged fixed height mount designed to provide absolute co-witness with AR-15 backup iron sights.

Customize your sight

A full selection of branded accessories such as flip-up covers and ARD filters are available from Aimpoint dealers. Customize your sight to meet your specific needs. Complete information for this product



COMPM4 SERIES SIGHTS

The first Comp sight came out in 1995 and today there are more than 1 million sights from the Comp series in use worldwide. All Comp sights are soldier-tested and combat-proven, in other words they are extremely robust high quality products.





COMPM4, COMPM45

Dot size 2 MOA*

Battery life: 80,000 hours**
Battery type: AA Battery

accepts 1.5-5v

Weight sight and

generation NVDs***

battery only: 9.45 oz

Weight std

configuration: 13.26 oz Compatible with CEU & 3XMag (see page 15) and all

Std configuration

The Aimpoint CompM4 series of sights are the toughest sights that Aimpoint has ever produced and they are the standard infantry soldier sight in many NATO countries. These optics are extremely rugged and operate continuously for up to 8 years using a single AA battery. The competition is not even close. The Aimpoint CompM4 is the latest version of the U.S. Army's M68CCO (Close-Combat Optic), continuing a legacy that Aimpoint has maintained since 1997.

The CompM4 has a top-mounted battery compartment while the CompM4s has a low battery compartment – this is the only difference between the sights.

Complete and ready to mount

The standard configuration of the CompM4 series of sights contains the sight (CompM4 or CompM4s), a QRP2 mount and a standard AR15 spacer. These sights also come equipped with a killFlash® anti-reflection device and bikini rubber lens covers.

Customize your sight

CompM4 and CompM4s sights can be customized according to your preferences and needs. Both the standard mount and spacer can be changed to meet the demands of your specific mission and equipment.

Complete information for COMPM4 Complete information for COMPM4S





The Aimpoint 3XMag magnifying module is a high quality optic that can be used with any Aimpoint sight for extended range target identification and engagement. This high quality accessory gives the shooter the best of both worlds: rapid CQB aiming with an Aimpoint sight, and long range target acquisition in combination with the magnifier. The Aimpoint TwistMount allows this transition to occur effortlessly and in just a matter of seconds.

Mechanical Interface

The recommended mount for the 3XMag is the Aimpoint TwistMount, which allows for quick attachment on any MIL-Std 1913 Picatinny Rail. Check if you need a spacer for co-witnessing with the Aimpoint sight.

The 3XMag can also be attached to aftermarket "flip to side" mounts.

Complete information about this product

3XMAG

Optical System

Magnification:

Eye relief:

Field of view (FOV): Exit pupil diameter:

Physical Specifications

Dimensions, L x W x H:

x W x H: 110 mm x 44 mm x 41 mm (4.3" x 1.7" x 1.6")

70 mm

7 .

7 mm

Weight: 2

200 g (7.1 oz) including rubber

cover

Environmental Specifications

Temperature range:

-45° C to + 70° C, (-50° F - +160° F)

Water resistance: Subm

in operation and storage Submersible to 20 m (67 ft)





The Aimpoint CEU (Concealed Engagement Unit) gives the operator the ability to observe and/or engage a threat from a concealed or covered position.

The Aimpoint CEU easily rotates from side to side so an operator can safely look

The Aimpoint CEU easily rotates from side to side, so an operator can safely look around either right or left-hand corners, over barricades and under vehicles. It can also be quickly removed in order to rapidly return to direct engagement.

Mechanical Interface

The Aimpoint CEU rotates a full 260° allowing the operator to safely look around either right or left-hand corners, up staircases or down tunnels from almost any angle. To mount the CEU, use the Aimpoint TwistMount base and choose the CEU ring which allows co-witnessing with the Aimpoint sight.

Complete information about this product





See page 9 for more details about TwistMount and CEU rings.

CEU

Physical Specifications

Dimensions L x W x H: 87 mm (3.4") x 115 mm (4.5") x

42 mm (1.7")

Weight: 135 grams (4.8 oz)

Material housing: High strength, glass reinforced,

PP polymer, black, non-glare finish

Environmental Specifications

Temperature range, Storage: +45° C to +71° C (-50° F to +160° F)
Temperature Range, Operating: +5° C to +71° C (+41° F to +160° F)

instantaneous

Immersion: 25 m (80 ft.)

Operating Principle: Dual mirror reflective device for

true target view.

Optical Magnification: 1x, unlimited eye relief.



MOUNTING SOLUTIONS



Low Wide Ring, 30 mm Black. Fits on Picatinny rail (MIL-STD 1913) Art. No. 12243 *



Quick Release Picatinny (MIL-STD 1913) Mount 30 mm Art. No. 12923*



Spacer for Ring Base & Top and TwistMount Ring. Raises height of optical axis from 30 to Art. No. 12227 *



CEU Low Rise ring Ring for CEU. Fits on TwistMount Base. 30 mm height of optical axis Art. No. 12202



CEU High Rise ring Ring for CEU. Fits on TwistMount Base. 39 mm height of optical Art. No. 12203



Separate ring for TwistMount Art. No. 12238 *



Complete Quick Release Mount for 3XMag and CEU Fits on Picatinny rail (MIL-STD 1913) Art. No. 12234 *



Separate base for Twist-Mount Fits on Picatinny rail (MIL-STD 1913) Art. No. 12236



Ring Base & Top Base and Top 30 mm ring. Fits QRP2, LRP and TNP Mounts Art. No. 12194 *



TNP Mount Torsion Nut Picatinny (MIL-STD 1913) Mount. For CompM4, PRO and Ring Base & Top Art. No. 12197 *



Quick Release Picatinny (MIL-STD 1913) Mount. For CompM4, PRO and Ring Base & Top. Return to zero after dismounting (Spacer is necessary for M4 flat top rifles and carbines)

Art. No. 12195 *



Quick Release Weaver Mount for CompM4, PRO and Ring Base & Top. Return to zero after dismounting (Spacer is necessary for M4 flat top rifles and carbines) Art. No. 11758 *



LRP Mount Lever Release Picatinny Mount for CompM4, PRO and Ring Base & Top. Return to zero after dismounting. Screws, Allen key and thread sealer included Art. No. 12198



Standard Spacer Spacer for for CompM4, PRO in conjunction with Art. No. 12194. Mount raises height of optical axis from 30 to 39 mm Art. No. 12192 *



Extension Spacer Spacer for CompM4, PRO in conjunction with Art. No. 12194. Mount raises height of optical axis from 30 to 39 mm and brings sight 40 mm forwards Art. No. 12193 *



Micro 11 mm Dovetail Mount Fits most of the 11 mm Dovetail Bases ranging from 10-12,5 mm Screws and Micro Tool included Art. No. 12215



Micro LRP Mount Lever Release Picatinny Mount for Micro sights. Return to zero after dismounting. Screws, Micro tool and thread sealer Art. No. 12905 *

Micro mount for Glock pistols

and Allen key included

Art. No. 12437



Micro Spacer Low For Micro T-1. Raises height of optical axis to 30 mm. Four screws (torx), Micro Tool and thread sealer included Art. No. 12357



Micro Spacer High For Micro T-1. Raises height of optical axis to 39 mm for cowitness with AR-15. Four screws (torx), Micro Tool and thread sealer included



Mount Adapter 34 mm For mounting Micro sights on magnifying scopes with 34 mm tube Art. No. 200153



Mount Adapter 30 mm For Micro T-1. Screws, Micro Tool For mounting Micro sights on magnifying scopes with 30 mm tube Art. No. 200152





ACCESSORIES



Flip-up Front Cover For CompM4, PRO and ACO Art. No. 12223



Flip-up Rear Cover For CompM4, PRO and ACO Art. No. 12224



Flip-up Front Cover Transparent For CompM4, PRO and ACO Art. No. 12241



Flip-up Rear Cover Transparent For CompM4, PRO and ACO Art. No. 12240



KillFlash® filter for CompM4, PRO and Art. No. 12239



Polarization Filter Polarization Filter for reduction of sun reflection. Fits rear of CompM4, PRO and ACO sights Art. No. 12216



Flip-Up Front Cover with Flip-up ARD (open & closed) For PRO, ACO and CompM4 Art. No. 12462



For Micro T-2 Art. No. 200191



Flip-Up Front Cover with Flip-up ARD Transparent (open & closed) For CompM4, PRO & ACO sights Art. No. 200122



Flip-up Front Cover



Flip-up Front Cover Transparent For Micro T-2 Art. No. 200192



For PRO and ACO mounted with Quick Release Art. No. 12228



Rubber Bikini Lens Cover For Micro H-1 Art. No. 12204



AA Battery Alkaline For CompM4 Art. No. 12242



Rubber Bikini Lens Cover

For CompM4

Art. No. 12205

Micro Tool Art. No. 12207

Double Battery Kit For PRO and ACO Art. No. 12247



DL₁/₃N, Lithium Battery For PRO & ACO Art. No. 10903



CR 2032 Lithium Battery For Micro sights Art. No. 12211



Outer Rubber Cover Color: Dark Earth Brown. For PRO and ACO. 1.8 oz (50 g) Art. No. 12226



Outer Rubber Cover Color: Black. For PRO and ACO. 1.8 oz (50 g) Art. No. 12225





Flip-up Rear Cover Transparent For Micro T-2 Art. No. 200193

TECHNICAL SPECS

OPTICAL DATA	MICRO T-1	MICRO T-2	MICRO H-1	PRO	AC0	COMPM4 COMPM4S
LED (Light Emitting Diode) totally eye-safe	x	x	x	х.	×	x
Light source wavelength, 650 mn red light	x	x	x	×	X.	x
Red dot size - in MOA (minutes of angle)*	4 or 2	2	2	2	2	2
Absence of parallax - No centering required	х	x	x	x	x	x
Unlimited eye relief	x	x		x	x	x
Band Pass coating for NVD*** compatibility	x	x	x	x	SER 511	x
Anti-reflex coating all surfaces & multi-layer coating objective	lens x	x	x	x *	χ.	X
No magnification (1X)	x	x	x	x x	x	x
ELECTRONIC DATA		A STATE OF THE STA				
One 3V Lithium battery, type	CR2032	CR2032	DL1/3N	2L76 or DL1/3N	DL1/3N	
One AA battery, accepts 1.5-5V	CONTRACTOR OF THE PARTY OF THE		and the same of the same	What son		x
Battery life in hours**	50,000 on setting 8	50,000 on setting 8	One year	30,000 on setting 7	One year	80,000 on setting 12
Battery life, in hours**, NVD settings	500,000	500,000		300,000	Le le M	500,000
Manual rotary switch - Dot intensity regulator	x	x	x	x	x	x
Daylight (DL) settings			. x	Off, 12 DL	Off, 9 DL	į.
NVD and daylight (DL) settings	1 Off, 4 NVD & 8 DL of which one extra bright	1 Off, 4 NVD & 8 DL of which one extra bright		1 Off, 4 NVD & 5 DL of which one extra bright		7 NVD & 9 DL of which one extra bright
MECHANICAL DATA	a but the second	The second second	1		- Vertical Service	
Material housing, extruded high strength aluminum	x	x	x	x	x	x l
Surface finish, hard anodized, matte	x	x	The state of the s	x	Y Y	x
Color black	x	x	x	x	x	x
Material lens covers -Thermoplastic Elastomer, black matte		x	100000000000000000000000000000000000000	x		x
Material lens covers - rubber - black - matte	x		x	ATE TO SERVE A	414 25 19	* 1.5
Adjustment 1 click =	13 mm at 100 m 1/2" at 100 yds	13 mm at 100 m 1/2" at 100 yds	13 mm at 100 m 1/2" at 100 yds	16 mm at 100 m 1/2" at 100 yds	16 mm at 100 m 1/2" at 100 yds	16 mm at 100 m 1/2" at 80 yds
Mounting methods	Integrated Picatinny mount	Integrated Picatinny mount	Integrated Picatinny rail mount	Integrated GRP2 mount	Integrated Picatinny mount	Integrated Picatinny QRP2 mount
ENVIRONMENTAL DATA	7.89 53				Jan 25, 177	
Temperature range -45° - +71° C (50°- +160° F)	x	x	The State of the S	x	2-15-14	x
Water resistance - submersible to	25 m (80 ft)	25 m (80 ft)	5 m (15 ft)	45 m (150 ft)	5 m (15 ft)	45 m (150 ft)
No radioactive components used	x	x	x	x	x	- x
DIMENSIONS	to the total of the state of	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		Sec. 1	2.76	
Length	62 mm (2.4")	68 mm (2.7")	2.4" / 62 mm	130 mm (5.1")	130 mm (5.1")	120 mm (4.7")
Width/height - sight house only	41 x 36 mm (1.6" x 1.4")	41 x 36 mm (1.6" x 1.4")	3.0 oz/ 84 g	55 x 55 mm (2.2" x 2.2")	55 x 55 mm (2.2" x 2.2")	53 x 60 mm (2.1" x 2.4")
Width/height - including standard mount	62 x 41mm (2.4" x 1.6")	62 x 41mm (2.4" x 1.6")	1.6" x 1.6" 41 x 40 mm	75 x 75 mm (2.95" x 2.95")	75 x 56 mm (2.95" x 2.2")	72 x 72 mm (2.8" x 2.8")
Maximum ring width		CHANGE TO SERVE		- 30 mm	30 mm	
Weight - sight house and battery only	84 g (2.96 oz)	94 g (3.31 oz)		220 g (7.8 oz)	190 g (6.7 oz)	268 g (9.45 oz)
Weight - Sight complete ****	116 (4.09 oz)	130 q (4.59 oz)	105 g	360 g (12.7 oz)	295 q (10.4 oz)	376 q (13.26 oz)

WARRANTY INFORMATION

Aimpoint values your business and always attempts to provide you the very best of products and services. That's why we back our products with one of the best guarantees in the industry. Our products are guaranteed to be free from original manufacturer defects in material and/ or workmanship under normal use from the date of purchase for two (2) years for professional users.

CUSTOMER SERVICE & DEALERSHIP ELIGIBILITY

For dealership eligibility and information about customer service, please scan the code or follow the link.

www.aimpoint.com/customerservice

www.aimpoint.com/dealership

GENERAL TECHNICAL DATA

	Micro T-1	Micro T-2	MICRO H-1	PRO	ACO	COMPM4 COMPM4S
APPLICATION AREAS						16-=1
Law Enforcement	•	•	•	•	•	•
Armed Forces - Special Units	•	•	•	0	-	•
APPLICATION FIREARMS			3.47	19.		174
Pistol - Revolver	•	•	•	15		
Carbine	•	•	•	•	•	•
PDW (personal weapon defence)	•	•	•	•	-	•
SMG (sub-machine gun)	•	•	•	•	1	•
LMG (light machine gun)	•	•	•	1 -	1-	•
MMG (medium machine gun)	•	•	•	J	-	•
HMG (Heavy machine gun	1	-	W			

FEATURES FOR ALL AIMPOINT RED DOT SIGHTS

- Working principle: Reflex collimator sight - red dot sight

OPTICAL DATA

- LED (Light Emitting Diode) totally eye-safe
- Light source wave length, 650 nm red light
- Absence of parallax No centering required
- Unlimited eye relief
- Anti-reflex coating all surfaces & multi-layer coating objective lens
- No magification (1X)

MECHANICAL DATA

- Material housing and tube, high strength aluminium
- Surface finish housing, anodized, semi-matte
- Black color housing


ENVIRONMENTAL DATA

- -Temperature range -45° +71° C (50° +160° F)
- Submersible, for more details see page 11
- No radioactive material used

Specifications are subject to change without notice.

^{*} MOA (minute of angle) 1 MOA ≈ 30 mm at 100 meters ≈ 1" at 100 yards

^{**} At room temperature
*** NVD = Night Vision Device
**** See the product pages for further details

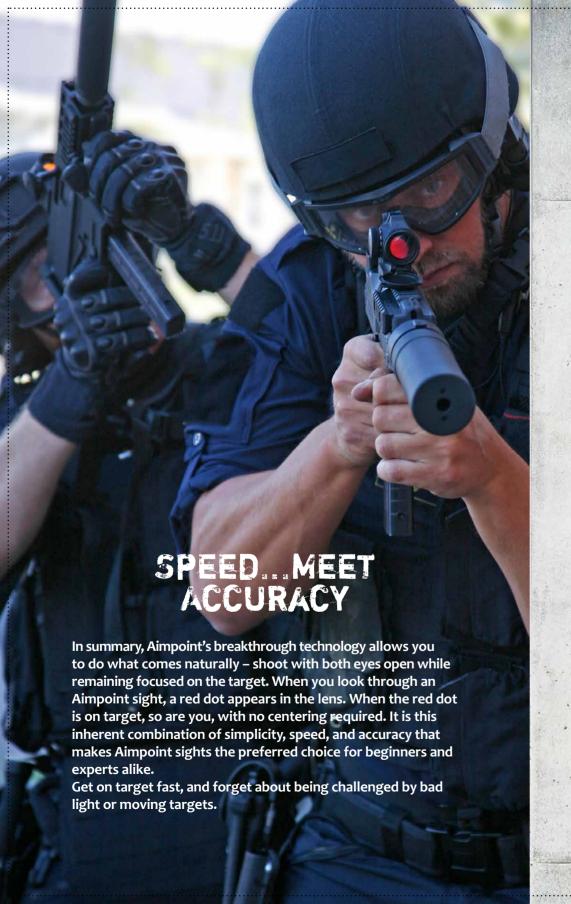

Aimpoint

Aimpoint, Inc. 14103 Mariah Court Chantilly, VA 20151 Phone 703.263.9795 Fax 703.263.9463 E-mail: info@aimpoint.com

www.aimpoint.com

THE FUTURE IN SIGHT

Photographers: Bigdomphoto , Stefan Albers, Peter Ozberg, Henry Kokko.

Art Direction and Layout: Thorn Reklambyra, Printing House: Exaktaprinting, Malmö, SWEDEN

This printed material is for information purposes only and does not constitute any binding obligation or agreement by Aimpoint AB

All rights reserved. © 2015 Aimpoint AB. Art. No. M01980